

TRILITE® UPRC300U

Uniform Particle Size Acid Cation Exchange Resin

Rev.3 Feb 2023

TRILITE® UPRC300U is a UPS, SAC gel-type exchange resin designed for ultrapure water applications with excellent ion removal capacity, allowing for the economical production of high-purity water. TRILITE® UPRC300U has outstanding physical and chemical strength, resulting in a low resin attrition rate over long-term use. It has a conversion rate of 99% or higher to its H⁺ form and is supplied in its H⁺ form.

Physical and Chemical Properties

Matrix	Polystyrene+DVB, Gel	Functional Group	Sulfonic acid
Ionic Form	H ⁺	Total Capacity(eq/ℓ)	1.90 ↑
Shipping Density(g/ℓ)	800	Moisture Retention(%)	50~56
Particle Density	1.2	Uniformity Coefficient	1.1 ↓
Particle Size(μm)	620±50	Swelling Rate(Na ⁺ →H ⁺ , %)	9
Whole Beads(%)	95 ↑	Ionic Conversion Rate(%)	H ⁺ 99.9 ↑

Recommended Operating Conditions

Operating Temp(°C)	120 ↓	pH Range	0~14
Bed Depth(mm)	800	Service Flow Rate(m/h)	5~120

Applications

TRILITE® UPRC300U is used for producing ultrapure water with very high resistivity and demanding control of TOC of less than 1ppb, in fields such as semiconductor, display, electronics, pharmaceuticals, power plants, and chemical manufacturing.

Hydraulic Characteristics

Figure 1 and 2 show the backwash expansion of TRILITE® UPRC300U as a function of flow rate and temperature.

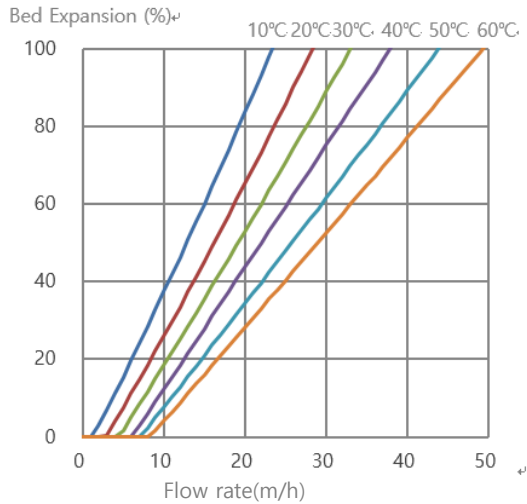


Figure 1. TRILITE® UPRC300U Bed Expansion

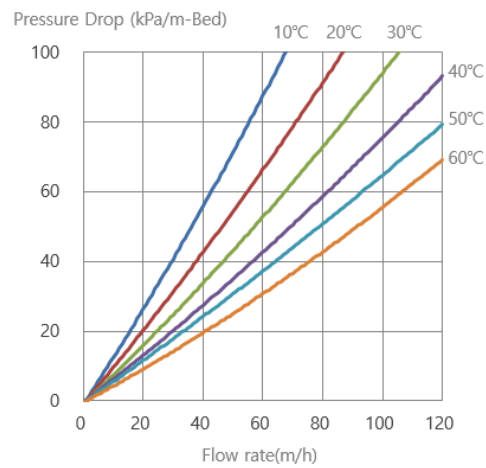


Figure 2. TRILITE® UPRC300U Drop Pressure

Resistivity and TOC Performance

Resistivity > 15.0 MΩ.cm (in 30min)

ΔTOC < 5ppb (in 120min)

Operation Condition (Feed Water) : Resistivity > 17.5 MΩ.cm, TOC < 2ppb, SV = 30

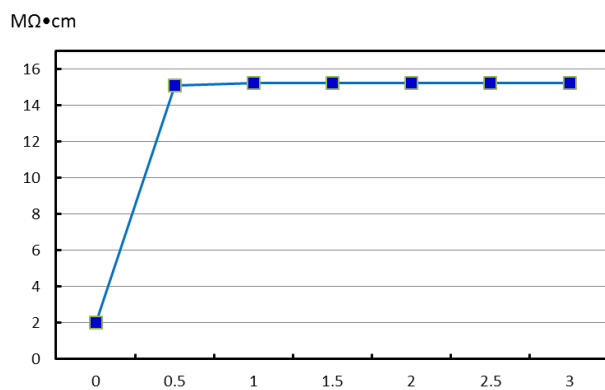


Figure 3. TRILITE® UPRC300U Resistivity

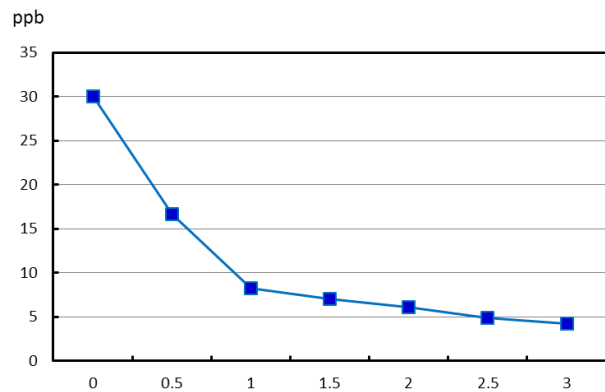


Figure 4. TRILITE® UPRC300U ΔTOC

All information contained in brochure is not absolute rather than relative one, created under the controlled environment by Samyang Corporation. Therefore, Samyang Corporation has no legal responsibility with respect to any and all information provided in brochure.

Samyang's TRILITE Ion exchange resins are produced based on the ISO 9001, ISO 14001 certification.

Samyang Corporation, 31 Jong-ro 33-gil, Jongno-gu, Seoul, Korea Tel: (02)740-7732~7, Fax: (02)740-7140



<http://samyangtrilite.com>